




ECU-C


**Energy communication unit
with advanced functions**

- Electricity data monitoring
- Power grid environment monitoring
- Anti-backflow control
- Built-in WiFi
- Apply to single phase or three phase system

DIMENSIONS

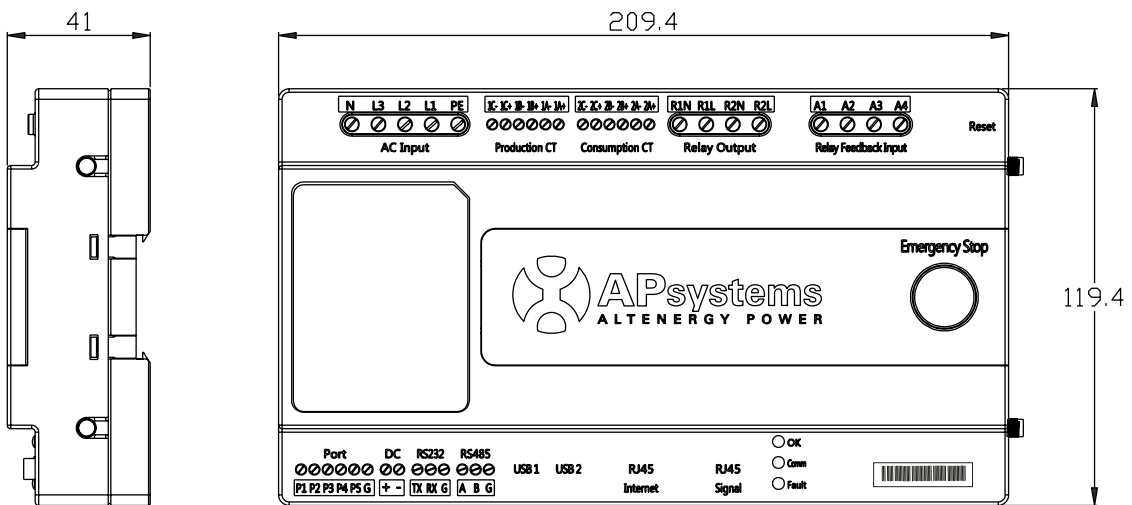

APPLICATION FOR CONFIGURATION & COMMISSIONING



Free download on APP Store and GOOGLE Play, the APsystems ECU APP becomes the interface of the ECU-R or the ECU-C allowing configuration and quick setup of the installation.



Please use the browser of the mobile device for scanning QR codes and download the ECU APP:



Region	EMEA
Model	ECU-C

Communication Interface

Communication Method	ZigBee
Ethernet	10/100M Auto-sensing, Auto-negotiation
Integrated Wi-Fi	802.11g/n
USB interface	Standard
RS232	Standard
RS485	Standard
RJ45	Standard

Power Supply

AC Power Supply	110~277VAC, 50~60Hz Single Phase – (3-Phase Optional)
DC Power Supply	12~16V
Power Consumption	3W

Mechanical Data

Dimensions (W×H×D)	210mm x 120mm x 41mm
Weight	500g (1.1lbs)
Ambient Temperature Range	-40°C to +65°C
Cooling	Natural convection; No Fans
Enclosure Environmental Rating	Indoor - IP20

Other Features

Grid Split Phase Type	Single Phase/ Three Phase + Neutral
CT Sensor	Production and consumption metering
Meter Accuracy	PV production (+/- 0.5% via CT) and consumption (+/- 2.5% via CT)

Compliance

Certifications	IEC/EN61010-1, EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, 2014/30/EU, EN301489-1/-17, EN62479, EN 300328
----------------	---

© All Rights Reserved

Specifications subject to change without notice please ensure you are using the most recent update found at web : emea.APsystems.com

European offices

APsystems

Cypresbaan 7, 2908LT, Capelle aan den IJssel, The Netherlands
Tel : 031-10-2582670
Email : emea@apsystems.com

APsystems

Rue des Monts d'Or, ZAC de Follieuses Sud-Les Echets,
01700 Miribel, France
Email : emea@apsystems.com | Tel: +33-4-81 65 60 40

